

Coil Specification (at 20 °C)

Coil Sensitivity	Nominal Voltage (VDC)	Nominal Current (mA)	Coil Resistance ($\Omega \pm 8\%$)	Power Consumption (W)	Pull-In Voltage (VDC)	Drop-Out Voltage (VDC)	Maximum Allowable Voltage (VDC)
BPD-DM	3	66.7	45	Abt. 0.2	75% Maximum	10% Minimum	130%
	5	40	125				
	6	33.3	180				
	9	22.2	405				
	12	16.7	720				
	24	8.3	2880				
	48	5.2	9200				


Ordering Information

BPD	-	SS	-	1	12	D	M	
								Contact Form: M:One form A
								Coil Type: D:Standard DC Coil
								Coil Voltage: 03:3V, 05:5V,06:6V,09:9V 12:12V,24:24V,48:48V
								Number of Pole: 1:One Pole
								Type of Sealing: SS:Plastic Sealed Type
								Type: BPD

Classification

Model	BPD
Coil Sensitivity	Standard DC Coil 1A
Plastic Sealed Type	BPD-SS-1□□DM

Dimension

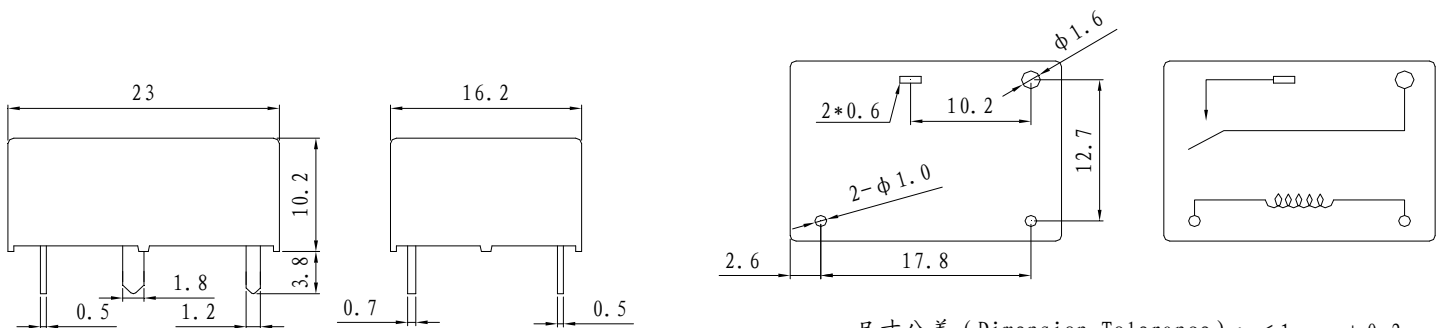

尺寸公差 (Dimension Tolerance) : < 1mm: $\pm 0.2\text{mm}$
 1--5mm: $\pm 0.3\text{mm}$
 > 5mm: $\pm 0.5\text{mm}$